
Pos.	Description
1	EXTERNAL UNIT HHP - SPLIT 1-PH
	OR 3-PH
2	IDU WH SPLIT
3	SYSTEM INTERFACE
4	LIGHT GATEWAY
5	EXTERNAL PROBE
6	UNDER FLOOR HEATING-COOLING
7	BY-PASS VALVE
8	HE KIT BELOW ODU + DRAIN PAN
9	KIT SHUT-OFF VALVE

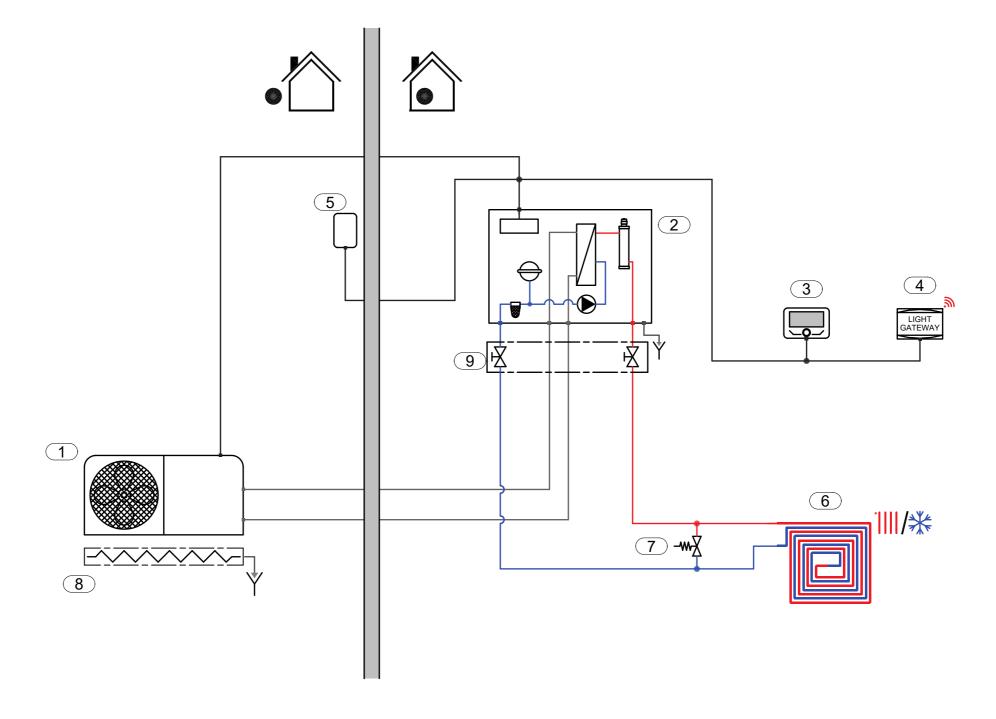

- This schematic has to be considered as example of the system functionality only and does not replace design by a qualified technician;
- The final schematic must be prepared respecting all the laws, norms and decrees in force, in order to facilitate a correct installation in compliance with the rule of the art;
- For the proper functioning of all system components, follow the instructions in the design, installation and user manuals provided by the manufacturer;
- This outline may be amended by the Ariston Group at any time without prior notice.

SCHEME Hydraulic


05/12/2023

DOTTE IN TANKE

PAGE 1/4



Pos.	Description		
1	EXTERNAL UNIT HHP - SPLIT 1-PH		
	OR 3-PH		
2	IDU WH SPLIT		
3	SYSTEM INTERFACE		
4	LIGHT GATEWAY		
5	EXTERNAL PROBE		
6	UNDER FLOOR HEATING-COOLING		
7	BY-PASS VALVE		
8	HE KIT BELOW ODU + DRAIN PAN		
9	KIT SHUT-OFF VALVE		

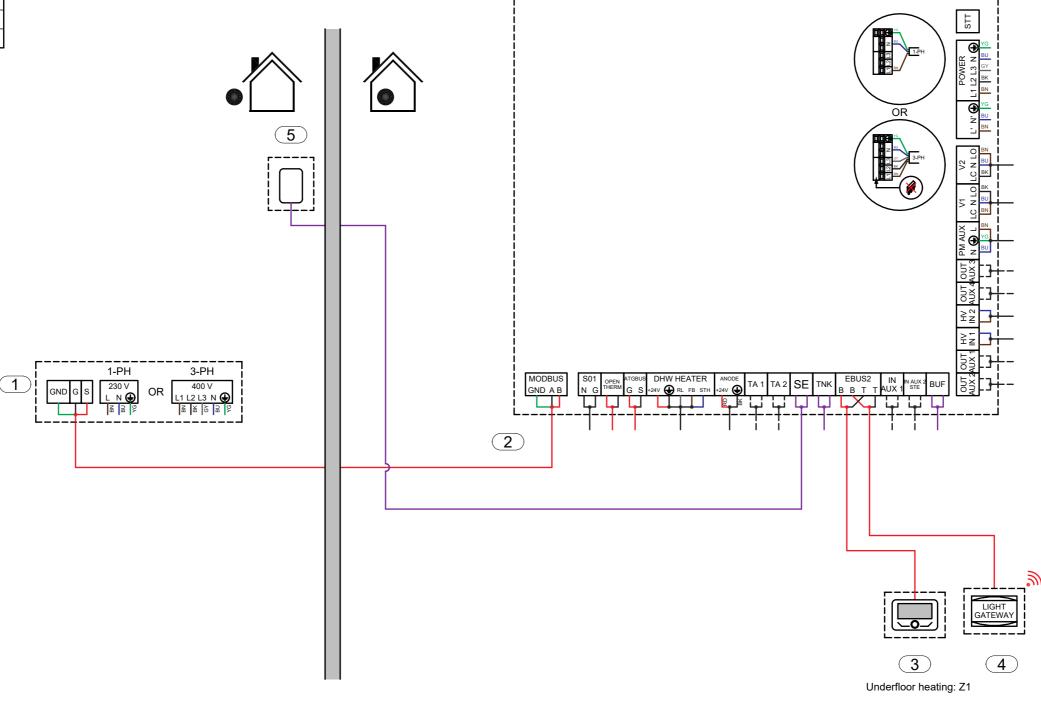

- This schematic has to be considered as example of the system functionality only and does not replace design by a qualified technician;
- The final schematic must be prepared respecting all the laws, norms and decrees in force, in order to facilitate a correct installation in compliance with the rule of the art;
- For the proper functioning of all system components, follow the instructions in the design, installation and user manuals provided by the manufacturer;
- This outline may be amended by the Ariston Group at any time without prior notice.

PAGE

SCHEME

05/12/2023



	Legend
	Hydraulic
	Hot water
	Cold water
	DHW hot water
	DHW cold water
	DHW mixed water
	DHW recirculation water
	Refrigerant fluid
	Gas connection
	Electric connection
•	Electric
	BN Brown (L1)
	BU Blue (N)
	YG Yellow green (PE)
	BK Black (L2)
	GY Grey (L3)
	RD Red
	Dry contact
	BUS connection
	Generic signal
	Sensor signal

Legend			
Hydraulic components			
	2-WAY VALVE		
•	CIRCULATOR GENERIC		
Xw-	BY-PASS VALVE		
	MAGNETIC FILTER		
Y	DISCHARGE		
	POLYPHOSPHATE FEEDER		
₩\	SAFETY VALVE		
	SYPHON		
Image: section of the content of the	NON RETURN VALVE		
×	SHUT-OFF VALVE		
A AB	THERMOSTATIC MIXING VALVE		
Ń	BALANCING VALVE		

	Legend			
	Drawing symbols			
A	INLET OR OUTLET AIR BLUE			
A	INLET OR OUTLET AIR RED			
**	COOLING			
	HEATING			
· /*	HEATING-COOLING			
3	WIFI			

SCHEME

Legend

DATE REV. PAGE

05/12/2023 3 / 4



⁻ This schematic has to be considered as example of the system functionality only and does not replace design by a qualified technician;

⁻ The final schematic must be prepared respecting all the laws, norms and decrees in force, in order to facilitate a correct installation in compliance with the rule of the art;

⁻ For the proper functioning of all system components, follow the instructions in the design, installation and user manuals provided by the manufacturer;

⁻ This outline may be amended by the Ariston Group at any time without prior notice.

MENU	N° PARAMETER	NAME	DESCRIPTION-OPTIONS	VALUE TO BE SET	RANGE	DEFAULT
HHP Energy Manager	1.0.0	IDU type	Defines the type of the internal unit: 0 = None 2 = Hydraulic module 3 = Light	2 = Hydraulic module	[0-3]	2
	1.0.1	ODU type	Defines the type of the outdoor unit: 1 = Heat Pump	1 = Heat pump	1	1
	1.0.2	Tank management	In case of DHW tank, to set which kind of sensor the DHW charge is managed through: 0 = None 1 = Storage with NTC 2 = Storage with Thermostat	0 = None	[0-2]	0
	1.1.8	System flow T selection	Defines which kind of device is used by the product to determine flow temperature to system: 0 = HP water flow temp 1 = System flow T	1 = System flow T	[0-1]	1
	1.8.0	Cooling mode activation	Activates the cooling mode: 0 = Not active ¦ 1 = Active	Up to user	[0-1]	0
Zone 1 parameter (For all thermoregulation parameters refer to the installer manual)	4.8.3	Heating Controller	Define with which device the heat request is performed 0 = None 1 = Room thermostat (Thermostat connected to TA1 of Energy Manager) 2 = Room sensor (Room sensor on eBus2)	2 = Room sensor	[0-2]	2
	4.8.4	Cooling controller	Define with which device the heat request is performed 0 = None 1 = Room thermostat 2 = Room sensor	If the cooling mode is active (1.8.0 = 1) set: 2 = Room sensor	[0-2]	2
	User Menu/Zones Management	Operatione Mode	Define the operation mode of the zone:	Up to user		
	4.2.9	Heat request mode	Define the Heat request mode for the zone 0 = Standard 1 =RT time program exclusion (In case of Room thermostat, the reduced temperature level doesn't inhibit the heat request) 2 = Forcing heat demand (Heat request always true)	Up to user	[0-2]	0

SOFTWARE COMPATIBILITY		
New Sensys	Starting from 00.07.12	
EM2.0	Starting from 22.05.27	
TDM	Starting from 21.01.186	

- This schematic has to be considered as example of the system functionality only and does not replace design by a qualified technician;
- The final schematic must be prepared respecting all the laws, norms and decrees in force, in order to facilitate a correct installation in compliance with the rule of the art;
- For the proper functioning of all system components, follow the instructions in the design, installation and user manuals provided by the manufacturer;
- This outline may be amended by the Ariston Group at any time without prior notice.

| SCHEME | Parameter list | DATE | REV. | PAGE | 05/12/2023 | 4 / 4

