
AR 35 PTP

		AR-35PTP
Voltage	V	380
Phase		three phase
Frequency	Hz	50
Heating capacity*	kW	45,30
Rated power input*	kW	11,27
Maximum current	A	29
Heating water capacity	L/H	970
COP*		4,02
Refrigerant		R417 A
Refrigerant charge	g	3700x2
Compressor		
Type		Rotary
Brand		Highly
Quantity		2
Condenser		Single wall tube in tube
Circulation pump		-
Rated water flow rate	m^3/h	8,00
Pressure Drop	Kpa	75
Circulation pump pressure head	m	-
Max. water temperature	°C	60
Operation temp. range	°C	-10 ~ 45
Noise	dB(A)	≤62
Connection	Inch	G1-1/4”
Weight	Kg	290
Index protection		IPX4
Insulation class		1
Dimension	mm	1230x1040x1420

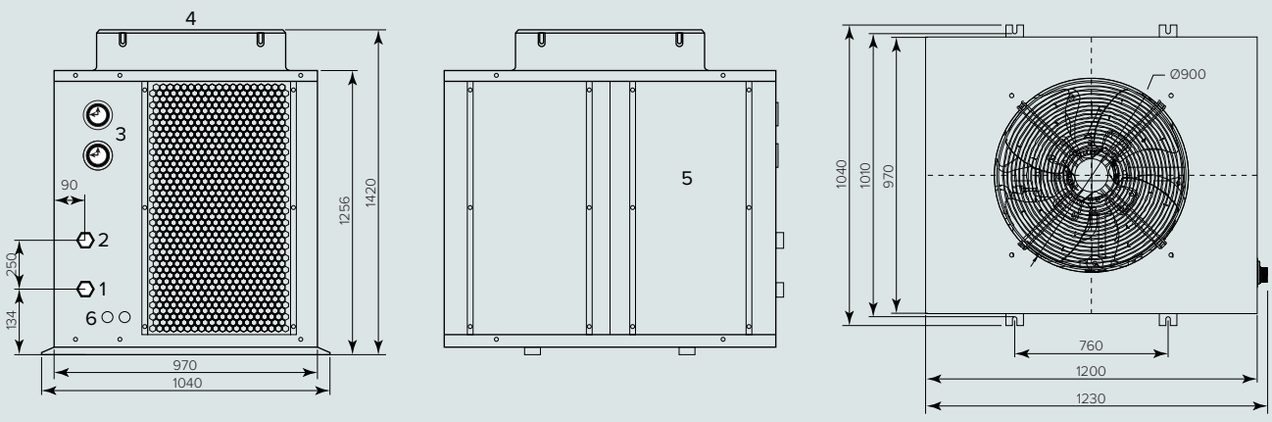

1. Heating water input
2. Heating water output
3. High/Low pressure gauge
4. Air output
5. Wiring box
6. Cable wiring

Legenda
O : Hot water outlet
I : Cold water inlet